




Model 30P

30,000 lb.

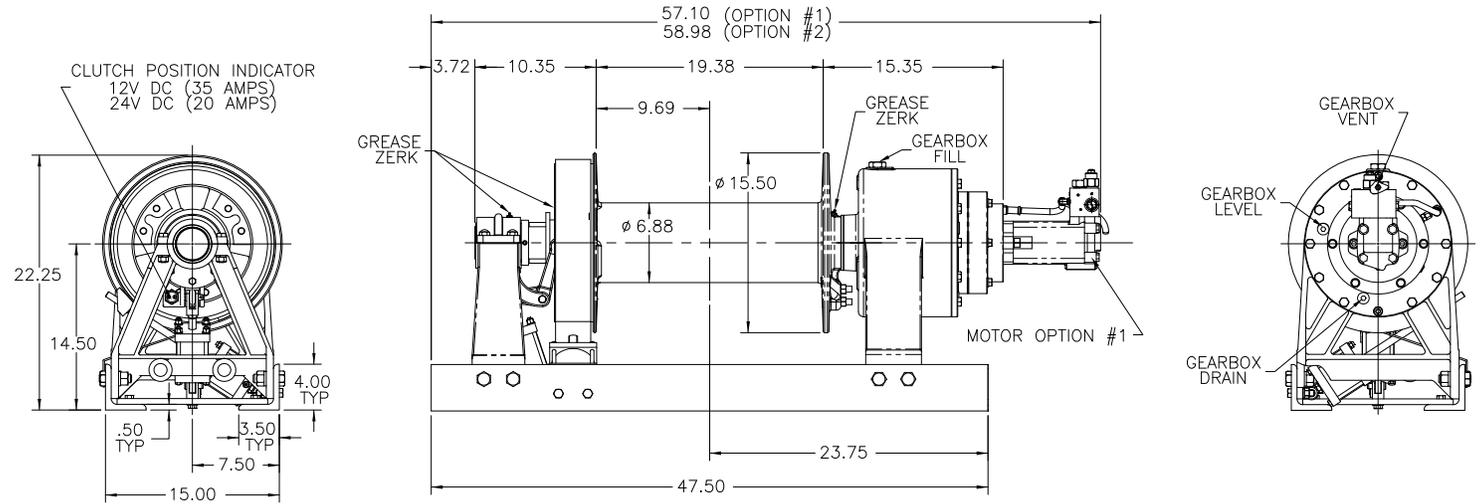


WEIGHT


SINGLE SPEED: 690 lbs.
2-SPEED: 700 lbs.

OPTIONAL FEATURES

MOTOR OPTION #1 SINGLE SPEED

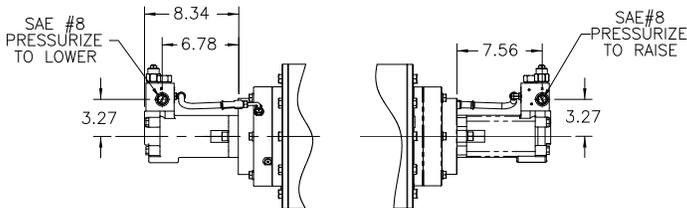

MOTOR OPTION #2 2-SPEED

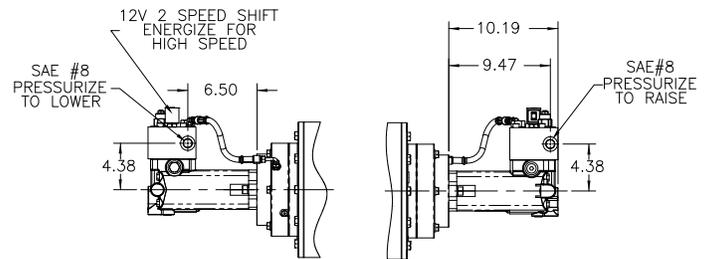

Because of continued product improvement, we reserve the right to make changes without notice.

Tulsa Winch Group is a worldwide provider of winch systems and electronic load information systems.

WARNING

Winches are not intended to be used for the lifting or moving of persons.

CAUTION

The last 5 wraps cable must be left on the drum to assist the cable clamp in holding the load.

P.O.Box 1130
Jenks, OK 74037-1130
Voice: 918-298-8300
Fax: 918-298-8301
www.team-twg.com





Model 30P

30,000 lb.



MOTOR OPTION #1 - SINGLE SPEED

LAYER	LINEPULL (lbs)	LINE SPEED (fpm)
1	30,000	29
2	25,794	34
3	22,569	39
4	20,062	44
5	18,055	49
6	16,414	54

Performance is based on 30 gpm @ 2500 psi
With $\varnothing.625$ " wire rope.



MOTOR OPTION #2 - 2-SPEED


LAYER	LINEPULL (lbs)		LINE SPEED (fpm)	
	LOW	HIGH	LOW	HIGH
1	30,000	15,046	29	59
2	25,794	12,897	34	69
3	22,569	11,285	39	78
4	20,062	10,031	44	88
5	18,055	9,028	49	98
6	16,414	8,207	54	108

Performance is based on 30 gpm @ 2500 psi
With $\varnothing.625$ " wire rope.

DRUM CAPACITY - FT.

LAYER	$\varnothing.625$ WIRE ROPE
1	61
2	132
3	213
4	304
5	406
6	517

TYPICAL HYDRAULIC SYSTEM

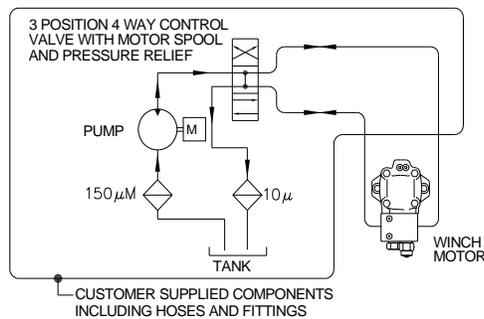

Because of continued product improvement, we reserve the right to make changes without notice.

WARNING

Winches are not intended to be used for the lifting or moving of persons.

CAUTION

The last 5 wraps cable must be left on the drum to assist the cable clamp in holding the load.

Tulsa Winch Group is a worldwide provider of winch systems and electronic load information systems.

P.O.Box 1130
Jenks, OK 74037-1130
Voice: 918-298-8300
Fax: 918-298-8301
www.team-twg.com

