

Chelsea® 348 Series

One Speed Forward and Reverse
Mechanical P.T.O.



Overview:

The Chelsea 348 Series P.T.O. is another example of why Chelsea P.T.O. technology is the best in the business. This economical workhorse features a cast iron housing and heavy duty ball bearing on the output shaft, giving it a high torque rating and long service life. Chelsea was the first to provide you with an Air shifted forward and reverse speed P.T.O. Its flexible Air shift design allows you to mount the air shift cylinder in the best position for maximum clearance. Torque rating up to 200 Lbs. ft. [271 N.m.] makes this one versatile P.T.O. Take advantage of over 65 years of Chelsea P.T.O. technology to increase performance and lower costs.

- Oil Field
- Logging



Contact Information:

Parker Hannifin Corporation
Chelsea Products Europe
Building 93, Vantage Point
Kingswinford, DY6 7FR
GROSSBRITANNIEN

Phone: +44 (0) 1384 282777

Fax: +44 (0) 1384 401851

chelseacustserv@parker.com

www.parker.com/chelsea



Product Features and Benefits:

- Single low-speed forward and reverse
- 8-Bolt Mounting Pad
- Removable cover plate for adjusting backlash
- Two Year Warranty
- Shift options include air and lever
- Variety of input gears to cover most applications



ENGINEERING YOUR SUCCESS.

348 SERIES POWER TAKE-OFF SPECIFICATIONS AND TECHNICAL DATA

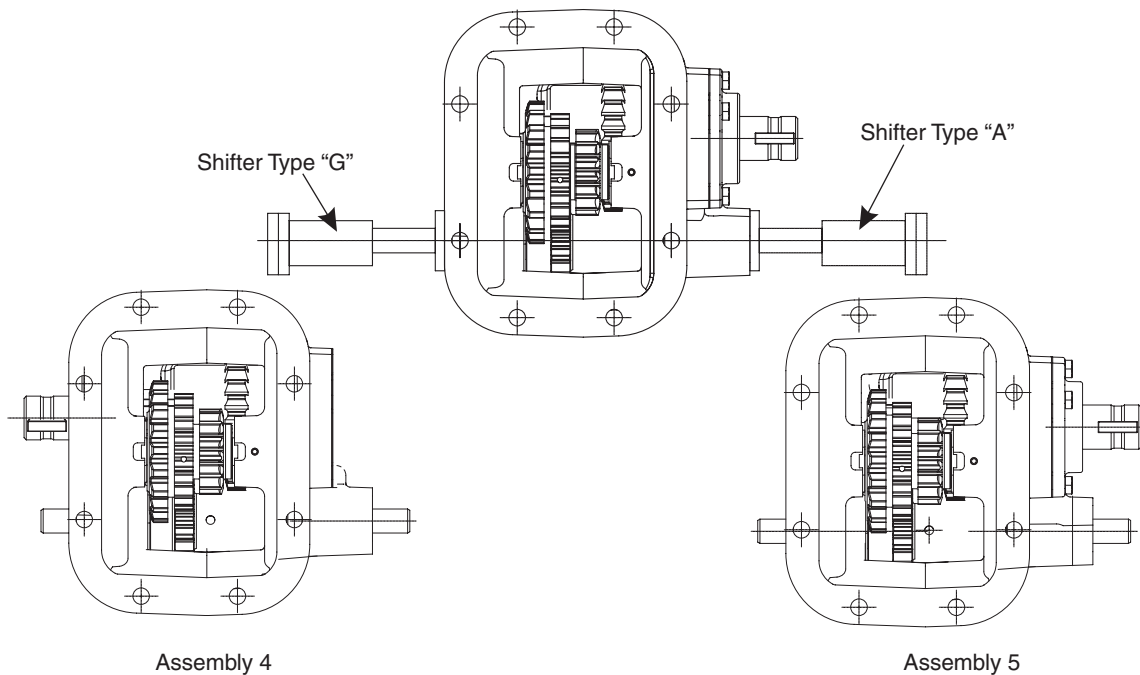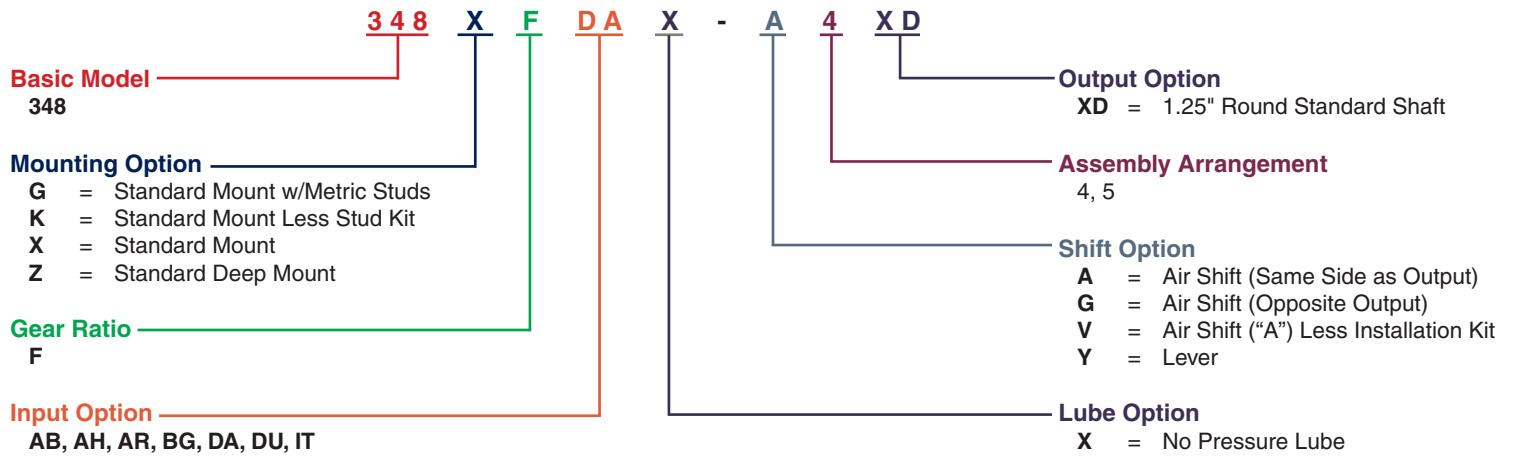

Specifications Chart

		348°F
Standard Output Shaft Size	_____	1-1/4" Round w/key
Intermittent Torque Rating (Lbs. ft.)		200
Intermittent Torque Rating (N.m.)		271
Horsepower Rating for Continuous Service		
At 500 R.P.M. of Output Shaft (HP)		19
At 1000 R.P.M. of Output Shaft (HP)		38
At 500 R.P.M. of Output Shaft (Kw)		14
At 1000 R.P.M. of Output Shaft (Kw)		28
Approximate Weight:	_____	32 lbs. [15 kg]